


Luminescence

Led design | technologie



Ultimate product, commercial led display

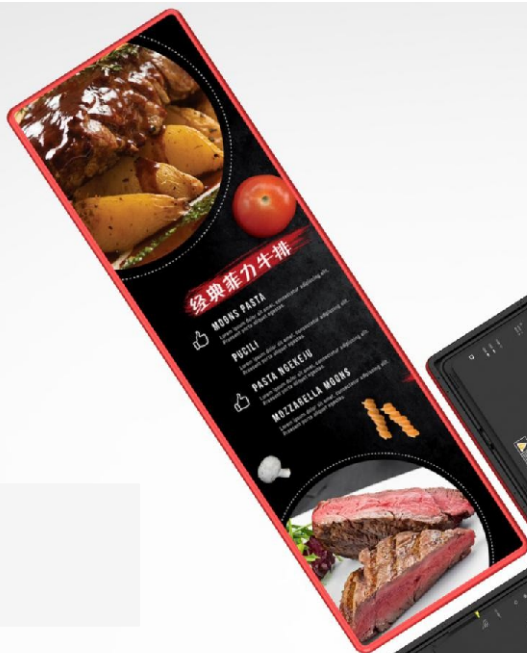

Simple
&
Convenient
Plug'N' Play

Ultra-slim
Ultra-light
Easy use
35mmthickness

Standardized

80"

Multiple
connection mode
Multi-screen
connection

Custom system

Intelligent


Android System

App Control




More Functions



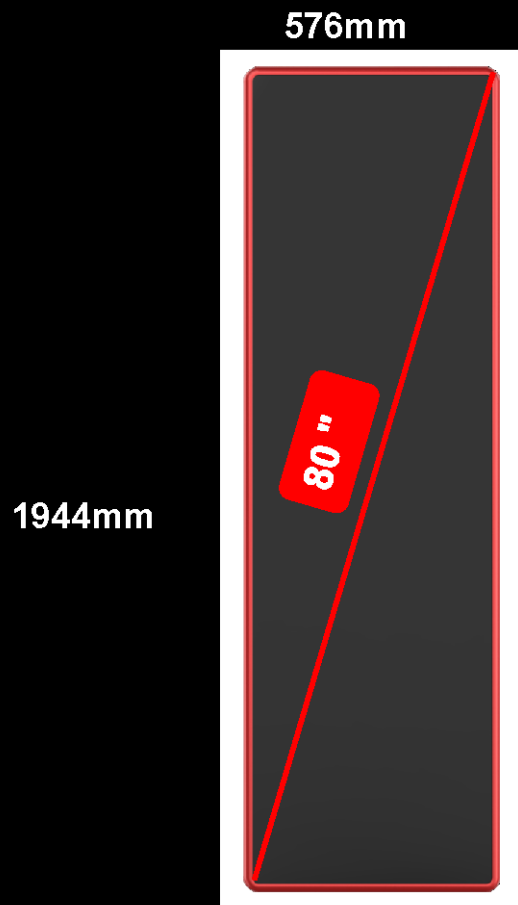


35mm

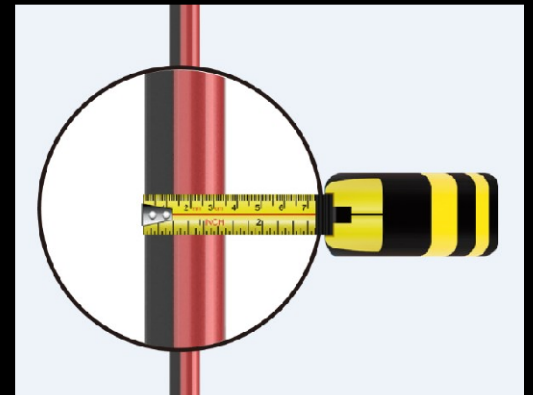


35mm(without frame)


★ Display Size Only

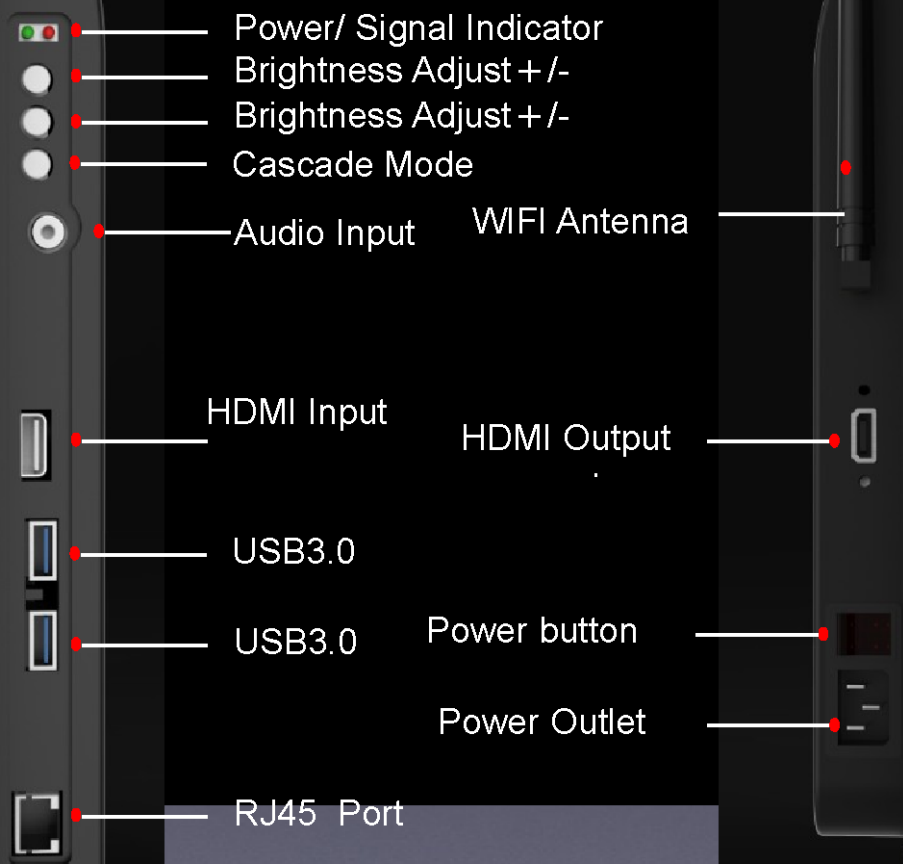

Support Multiple Display Mode

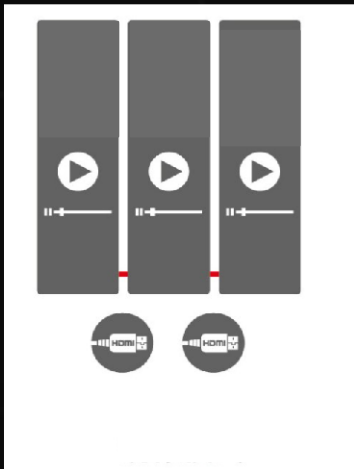


Mirror Mode

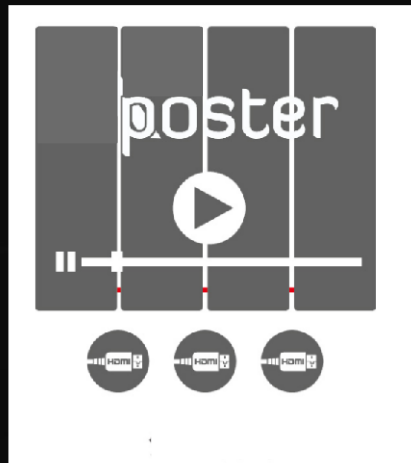

Extended Mode



Optional Colored Outer Frame

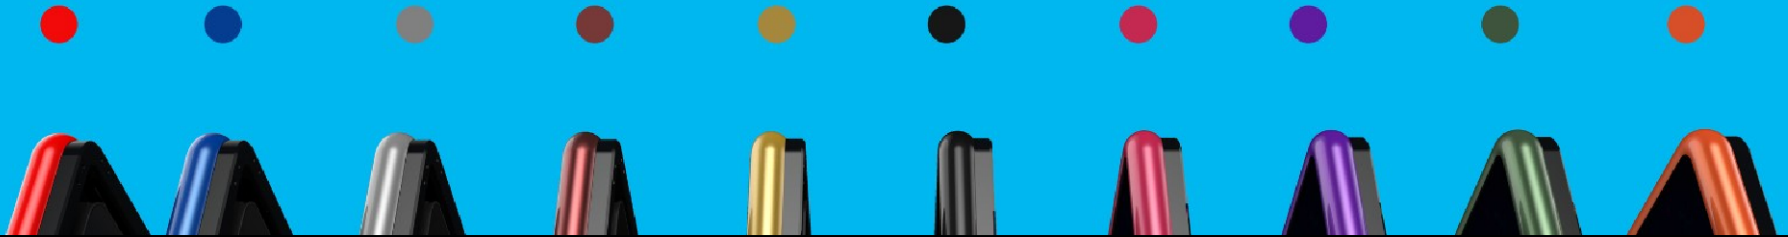


Display Screen Transparent
PC Glass Colorful Outer Frame





**Vertical
Installation
&
Floor –standing
Installation**



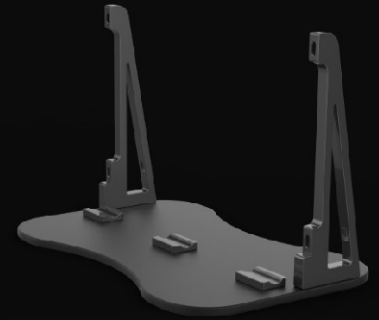

Portrait Stand



Hidden Floor Stand

Floor-standing Installation




Vertical Hanging

Horizontal Hanging





A Product supports DIY installation

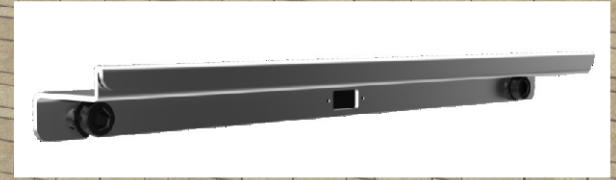

Hanging Brackets

Magnetic front maintenance



Magnetic tool



Transparent PC Glass



★ Power -supply :
rear maintenance

LED Module & receiving
card: front maintenance



Tool-free to remove control box



RJ45 Cable



HDMI Cable




Magnetic Tool



Hanging Hook



Hanging Brackets



Stand Floor




Asynchronous Control



Synchronous Card



Receiving Card

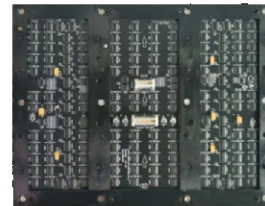

Module



**2pcs Poster in
1 flightcase**



Carrier bag

Parameters		
Pixel Pitch (mm)	1.8	2.571
Pixel Composition	3in1(1515)	3in1(2020)
Module Resolution/pixels	160*120/dots	112*84/dots
Panel Resolution/pixels	320*1080(80")	224*756(80")
Module Size(mm)	288*216	
Panel Size(mm)	1944*576*35mm (without frame)	
Panel Material	Aluminum	
Panel Weight /panel (kg)	35/kg	
Color Depth(Bit)	14bit	
Refresh Rate (Hz)	≥3840	
Drive Method/scan	1/30	1/28
Brightness (cd/m ²)	600~ 1000cd/m ² adjustable (8 grades)	
View Angle (H°/V°)	H/160°/V/160°	
AC Power Input (V)	AC110V~220V(50~60Hz)	
AC input Max (W/m ²)	660W/m ²	660W/m ²
AC Input AVG. (W/m ²)	200W/m ²	200W/m ²
Control Mode	USB,HDMI,RJ45 port, WIFI	
Support Video Mode	MP4 , AVI ,MPEG and more	
Storage Temperature (°C)	—10 - 50	
Operating Temperature (°C)	0 - 40	
Storage Humidity (RH)	10%~90% no condensation	
IP Rating	IP40/IP40	
Operating Humidity (RH)	10%~90% no condensation	
Products Lifespan (hrs)	100000	
Installation Type	Mounting / Floor-landing/ Hanging	
Maintenance Type	Front & Rear maintenance	

The above data is the prototype test parameters for reference only, the final interpretation right belongs to Shenzhen



- ◆ Car 4s shop
- ◆ Fashion Brand Shop
- ◆ Shopping malls & supermarkets
- ◆ Retail & chain shops
- ◆ Hotels . Estate



THANKS

Luminescence

Led design technologies

107, rue de Javel
75015 Paris

Contact: Alexandre Verselle
Tél: +33 1 81 69 37 47

@: alexandre@luminescence-led.com
Web: www.luminescence-led.com



Sur mesure

Nous développons et innovons vos projets créatifs en fonction de chaque demande, chaque pièce est UNIQUE !

Des écrans créatifs en LED (sphère, cube, rideaux ...).

Adoptez votre forme au bon format et communiquez différemment !